



**Technical and Test Institute
for Construction Prague**

Prosecká 811/76a
190 00 Prague
Czech Republic
eota@tzus.cz



Member of



www.eota.eu

European Technical Assessment

ETA 23/0562 of 13/07/2023

(English language translation, the original version in Czech language)

Technical Assessment Body issuing the ETA: Technical and Test Institute
for Construction Prague

Trade name of the construction product

Unifix Injection System Poly 3.0

**Product family to which the
construction product belongs**

Product area code: 33
Bonded injection type anchor for use in
uncracked concrete

Manufacturer

UNIFIX SWG S.r.l.
Via Enzenberg 2
Terlano (BZ), 39018
Italy

Manufacturing plant(s)

Stabiliento 1 – (Italia)

**This European Technical Assessment
contains**

18 pages including 15 Annexes which form
an integral part of this assessment.

**This European Technical Assessment is
issued in accordance with regulation
(EU) No 305/2011, on the basis of**

EAD 330499-01-0601
Bonded fasteners for use in concrete

Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and should be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full (excepted the confidential Annex(es) referred to above). However, partial reproduction may be made, with the written consent of the issuing Technical Assessment Body - Technical and Test Institute for Construction Prague. Any partial reproduction has to be identified as such.

1. Technical description of the product

The Unifix Injection System Poly 3.0 for uncracked concrete is a bonded anchor consisting of a cartridge with injection mortar and a steel element. The steel element consists of a commercial threaded rod, a hexagon nut and a washer. The steel elements are made of galvanized steel or stainless steel.

The steel element is placed into a drilled hole filled with injection mortar and is anchored via the bond between metal part, injection mortar and concrete.

The illustration and the description of the product are given in Annex A.

2. Specification of the intended use in accordance with the applicable EAD

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The provisions made in this European Technical Assessment are based on an assumed working life of the anchor of 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the products in relation to the expected economically reasonable working life of the works.

3. Performance of the product and references to the methods used for its assessment

3.1 Mechanical resistance and stability (BWR 1)

Essential characteristic	Performance
Characteristic resistance to tension load (static and quasi-static loading)	Annex C 1, C 2, C 3
Characteristic resistance to shear load (static and quasi-static loading)	Annex C 1, C 4
Displacements under short term and long term loading	Annex C 5
Durability	Annex B 1
Characteristic resistance and displacements for seismic performance categories C1 and C2	NPA

3.2 Hygiene, health and environment (BWR 3)

No performance determined.

3.3 General aspects relating to fitness for use

Durability and serviceability are only ensured if the specifications of intended use according to Annex B1 are kept.

4. Assessment and verification of constancy of performance (AVCP) system applied with reference to its legal base

According to the Decision 96/582/EC of the European Commission¹ the system of assessment verification of constancy of performance (see Annex V to Regulation (EU) No 305/2011) given in the following table applies.

Product	Intended use	Level or class	System
Metal anchors for use in concrete	For fixing and/or supporting to concrete, structural elements (which contributes to the stability of the construction works) or heavy units	-	1

¹ Official Journal of the European Communities L 254 of 08.10.1996

5. Technical details necessary for the implementation of the AVCP system, as provided in the applicable EAD

The factory production control shall be in accordance with the control plan which is a part of the technical documentation of this European Technical Assessment. The control plan is laid down in the context of the factory production control system operated by the manufacturer and deposited at Technický a zkušební ústav stavební Praha, s.p.² The results of factory production control shall be recorded and evaluated in accordance with the provisions of the control plan.

Issued in Prague on 13.07.2023

By


Ing. Jiří Studnička, Ph.D.

Head of the Technical Assessment Body

² The control plan is a confidential part of the documentation of the European Technical Assessment, but not published together with the ETA and only handed over to the approved body involved in the procedure of AVCP.

Installation threaded rod M8 up to M16

prepositioned installation or
push through installation (annular gap filled with mortar)

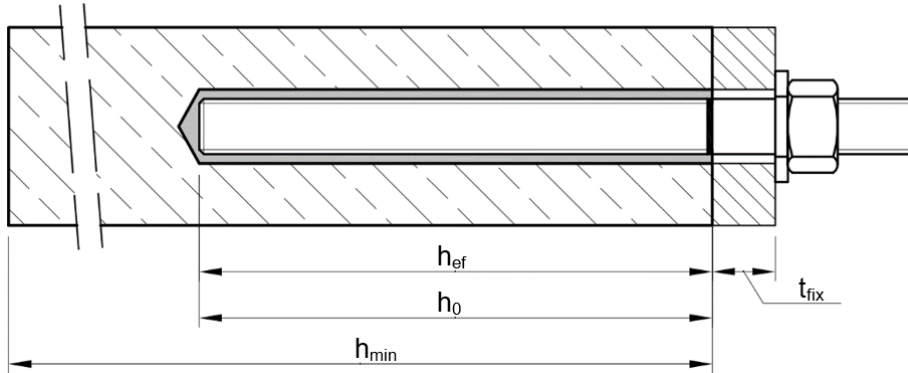

t_{fix} = thickness of fixture
 h_{ef} = effective embedment depth
 h_{min} = minimum thickness of member

h_0 = depth of drill hole

Unifix Injection System Poly 3.0 for concrete


Product description
Installed conditions

Annex A 1

Cartridge system

Coaxial Cartridge:

150 ml, 280 ml, 300 ml up to 333 ml and 380 ml up to 420 ml




Imprint:
Poly 3.0

Processing and safety instructions, shelf life, charge number, manufacturer's information, quantity information

Side-by-Side Cartridge:

235 ml, 345 ml up to 360 ml and 825 ml




Imprint:
Poly 3.0

Processing and safety instructions, shelf life, charge number, manufacturer's information, quantity information

Foil Tube Cartridge:

165 ml and 300 ml



Imprint:
Poly 3.0

Processing and safety instructions, shelf life, charge number, manufacturer's information, quantity information

Static mixer SM-14W




Unifix Injection System Poly 3.0 for concrete

Product description
Injection system

Annex A 2

Threaded rod M8 up to M16 with washer and hexagon nut

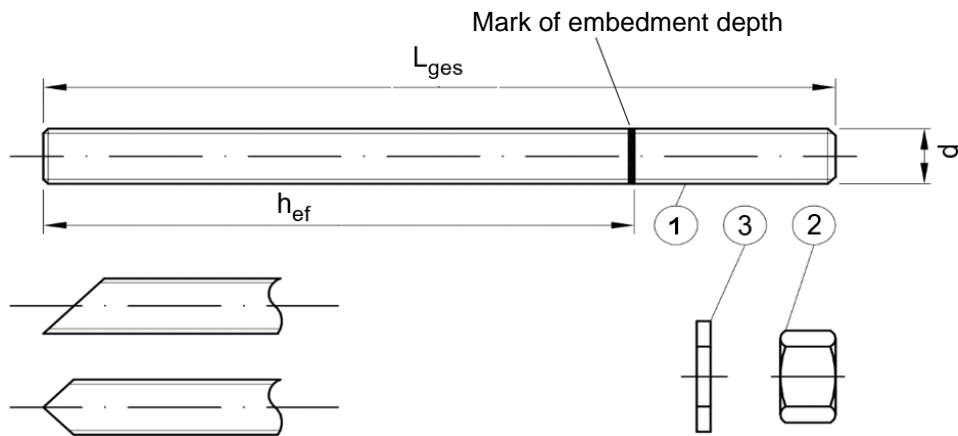

Commercial standard threaded rod with:

- Materials, dimensions and mechanical properties acc. Table A1
- Inspection certificate 3.1 acc. to EN 10204:2004
- Marking of embedment depth

Unifix Injection System Poly 3.0 for concrete

Product description
Threaded rod

Annex A 3

Table A1: Materials						
Part	Designation	Material				
Steel, zinc plated (Steel acc. to EN ISO 683-4:2018 or EN 10263:2001)						
<ul style="list-style-type: none"> - zinc plated $\geq 5 \mu\text{m}$ acc. to EN ISO 4042:2018 or - hot-dip galvanized $\geq 40 \mu\text{m}$ acc. to EN ISO 1461:2009 and EN ISO 10684:2004+AC:2009 or - sherardized $\geq 45 \mu\text{m}$ acc. to EN ISO 17668:2016 						
1	Anchor rod	Property class	Characteristic steel ultimate tensile strength	Characteristic steel yield strength	Elongation at fracture	
		acc. to EN ISO 898-1:2013	4.6	$f_{uk} = 400 \text{ N/mm}^2$	$f_{yk} = 240 \text{ N/mm}^2$	$A_5 > 8\%$
			4.8	$f_{uk} = 400 \text{ N/mm}^2$	$f_{yk} = 320 \text{ N/mm}^2$	$A_5 > 8\%$
			5.6	$f_{uk} = 500 \text{ N/mm}^2$	$f_{yk} = 300 \text{ N/mm}^2$	$A_5 > 8\%$
			5.8	$f_{uk} = 500 \text{ N/mm}^2$	$f_{yk} = 400 \text{ N/mm}^2$	$A_5 > 8\%$
8.8	$f_{uk} = 800 \text{ N/mm}^2$	$f_{yk} = 640 \text{ N/mm}^2$	$A_5 > 8\%$			
2	Hexagon nut	acc. to EN ISO 898-2:2012	4	for anchor rod class 4.6 or 4.8		
			5	for anchor rod class 5.6 or 5.8		
			8	for anchor rod class 8.8		
3	Washer	Steel, zinc plated, hot-dip galvanized or sherardized (e.g.: EN ISO 887:2006, EN ISO 7089:2000, EN ISO 7093:2000 or EN ISO 7094:2000)				
Stainless steel A2 (Material 1.4301 / 1.4307 / 1.4311 / 1.4567 or 1.4541, acc. to EN 10088-1:2014)						
Stainless steel A4 (Material 1.4401 / 1.4404 / 1.4571 / 1.4362 or 1.4578, acc. to EN 10088-1:2014)						
High corrosion resistance steel (Material 1.4529 or 1.4565, acc. to EN 10088-1: 2014)						
1	Anchor rod ¹⁾	Property class	Characteristic steel ultimate tensile strength	Characteristic steel yield strength	Elongation at fracture	
		acc. to EN ISO 3506-1:2009	50	$f_{uk} = 500 \text{ N/mm}^2$	$f_{yk} = 210 \text{ N/mm}^2$	$A_5 > 8\%$
			70	$f_{uk} = 700 \text{ N/mm}^2$	$f_{yk} = 450 \text{ N/mm}^2$	$A_5 > 8\%$
80	$f_{uk} = 800 \text{ N/mm}^2$		$f_{yk} = 600 \text{ N/mm}^2$	$A_5 > 8\%$		
2	Hexagon nut ¹⁾	acc. to EN ISO 3506-1:2009	50	for anchor rod class 50		
			70	for anchor rod class 70		
			80	for anchor rod class 80		
3	Washer	A2: Material 1.4301, 1.4311 / 1.4307 / 1.4567 or 1.4541, EN 10088-1:2014 A4: Material 1.4401, 1.4404 / 1.4571 / 1.4362 or 1.4578, EN 10088-1:2014 HCR: Material 1.4529 or 1.4565, acc. to EN 10088-1: 2014 (e.g.: EN ISO 887:2006, EN ISO 7089:2000, EN ISO 7093:2000 or EN ISO 7094:2000)				
1) Property class 80 only for stainless steel A4 and high corrosion resistant steel HCR						
Unifix Injection System Poly 3.0 for concrete					Annex A 4	
Product description Materials						

Specifications of intended use

Fasteners subject to (Static and quasi-static loads):

	Working life 50 years		Working life 100 years	
Base material	uncracked concrete	cracked concrete	uncracked concrete	cracked concrete
HD: Hammer drilling CD: Compressed air drilling	M8 to M16	No performance assessed	No performance assessed	No performance assessed
Temperature Range:	I: -40°C to +40°C ¹⁾ II: -40°C to +80°C ²⁾		I: -40°C to +40°C ¹⁾ II: -40°C to +80°C ²⁾	

1) (max. long-term temperature +24°C and max. short-term temperature +40°C)

2) (max. long-term temperature +50°C and max. short-term temperature +80°C)

Base materials:

- Compacted reinforced or unreinforced normal weight concrete without fibres according to EN 206:2013 + A1:2016.
- Strength classes C20/25 to C50/60 according to EN 206:2013 + A1:2016

Use conditions (Environmental conditions):

- Structures subject to dry internal conditions (all materials).
- For all other conditions according to EN 1993-1-4:2006+A1:2015 corresponding to corrosion resistance class:
 - Stainless steel A2 according to Annex A 4, Table A1: CRC II
 - Stainless steel A4 according to Annex A 4, Table A1: CRC III
 - High corrosion resistance steel HCR according to Annex A 4, Table A1: CRC V

Design:

- Verifiable calculation notes and drawings are prepared taking account of the loads to be anchored. The position of the fastener is indicated on the design drawings (e. g. position of the fastener relative to reinforcement or to supports, etc.).
- Fasteners are designed under the responsibility of an engineer experienced in fasteners and concrete work.
- The fasteners are designed in accordance to EN 1992-4:2018 and Technical Report TR 055, Edition February 2018.

Installation:

- Dry, wet concrete or flooded bore holes (not sea-water).
- Hole drilling by hammer drill (HD) or compressed air drill mode (CD).
- Overhead installation allowed.
- Fastener installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site.

Unifix Injection System Poly 3.0 for concrete

Intended use
Specifications

Annex B 1

Table B1: Installation parameters for threaded rod


Anchor size		M8	M10	M12	M16
Diameter of element	$d = d_{nom}$ [mm]	8	10	12	16
Nominal drill hole diameter	d_0 [mm]	10	12	14	18
Effective embedment depth	$h_{ef,min}$ [mm]	60	60	70	80
	$h_{ef,max}$ [mm]	160	200	240	320
Diameter of clearance hole in the fixture	Prepositioned installation $d_f \leq$	9	12	14	18
	Push through installation d_f	12	14	16	20
Maximum torque moment	$\max T_{inst} \leq$ [Nm]	10	20	40	80
Minimum thickness of member	h_{min} [mm]	$h_{ef} + 30 \text{ mm} \geq 100 \text{ mm}$			$h_{ef} + 2d_0$
Minimum spacing	s_{min} [mm]	40	50	60	80
Minimum edge distance	c_{min} [mm]	40	50	60	80

Table B2: Parameter cleaning and installation tools


Threaded rod	d_0 Drill bit - \emptyset	d_b Brush - \emptyset		$d_{b,min}$ min. Brush - \emptyset
[mm]	[mm]	[mm]		[mm]
M8	10	RBT10	12	10,5
M10	12	RBT12	14	12,5
M12	14	RBT14	16	14,5
M16	18	RBT18	20	18,5

Cleaning and installation tools


Hand pump
(Volume 750 ml, $h_0 \geq 10 d_{nom}$)




Compressed air tool
(min 6 bar)



Brush RBT



Brush extension RBL



Unifix Injection System Poly 3.0 for concrete	Annex B 2
<p>Intended use Installation parameters Parameter anchor and drill sizes, brushes, Cleaning and Installation tools</p>	

Table B3: Working and curing time Poly 3.0

Temperature in base material			Maximum working time	Minimum curing time
T			t_{work}	t_{cure}
- 5 °C	to	- 1 °C	90 min	6 h
+ 0 °C	to	+ 4 °C	45 min	3 h
+ 5 °C	to	+ 9 °C	25 min	2 h
+ 10 °C	to	+ 14 °C	20 min	100 min
+ 15 °C	to	+ 19 °C	15 min	80 min
+ 20 °C	to	+ 29 °C	6 min	45 min
+ 30 °C	to	+ 34 °C	4 min	25 min
+ 35 °C	to	+ 39 °C	2 min	20 min
Cartridge temperature			+5°C up to +40°C	

--	--	--	--	--


Unifix Injection System Poly 3.0 for concrete

Intended use
Working and curing time

Annex B 3

Installation instructions

Drilling of the bore hole

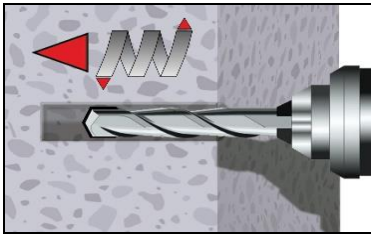


1. Hammer drilling (HD) / Compressed air drilling (CD)


Drill a hole to the required embedment depth.
Drill bit diameter according to Table B1.
Aborted drill holes shall be filled with mortar.
Proceed with Step 2 (MAC or CAC).

Manual Air Cleaning (MAC)


Drill hole depth $h_0 \leq 10d_{nom}$ with drilling method HD/CD

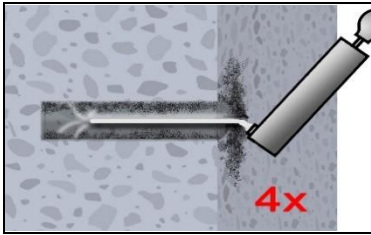

Attention! Remove standing water in the borehole before cleaning.
2a. Blow the bore hole clean minimum 4x from the bottom or back by hand pump (Annex B 2).

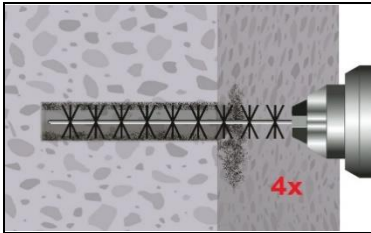


2b. Attach brush RBT according to Table B2 to a drilling machine or a cordless screwdriver. Brush the bore hole minimum 4x over the entire embedment depth in a twisting motion (if necessary, use a brush extension RBL).

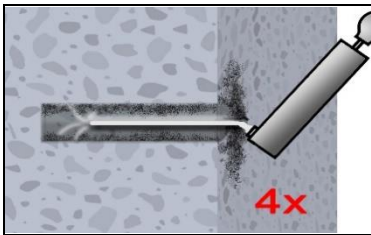

2c. Finally blow the bore hole clean minimum 4x from the bottom or back by hand pump (Annex B 2).


Compressed Air Cleaning (CAC):

All diameter with drilling method HD/CD

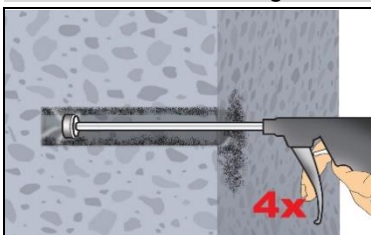

Attention! Standing water in the bore hole must be removed before cleaning.

2a. Blow the bore hole clean minimum 4x with compressed air (min. 6 bar) (Annex B 2) over the entire embedment depth until return air stream is free of noticeable dust. (If necessary, an extension shall be used.)

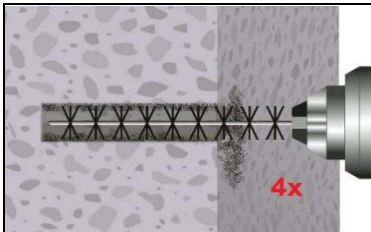


2b. Attach brush RBT according to Table B3 to a drilling machine or a cordless screwdriver. Brush the bore hole minimum 4x over the entire embedment depth in a twisting motion. (If necessary, a brush extension RBL shall be used.)

Unifix Injection System Poly 3.0 for concrete

Intended use
Installation instructions


Annex B 4

Installation instructions (continuation)

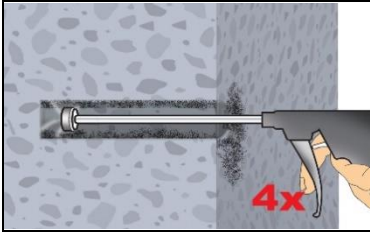


2c. Finally blow the bore hole clean minimum 4x with compressed air (min. 6 bar) (Annex B 2) over the entire embedment depth until return air stream is free of noticeable dust. (If necessary, an extension shall be used.)


Cleaned bore hole has to be protected against re-contamination in an appropriate way. If necessary, repeat cleaning process directly before dispensing the mortar. In-flowing water must not contaminate the bore hole again.

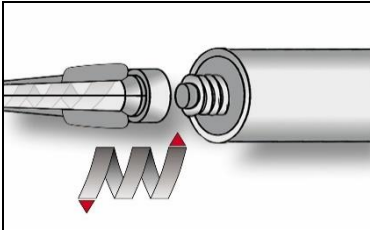


3. Screw on static-mixing nozzle SM-14W and load the cartridge into an appropriate dispensing tool. For every working interruption longer than the maximum working time t_{work} (Annex B 3) as well as for new cartridges, a new static-mixer shall be used.

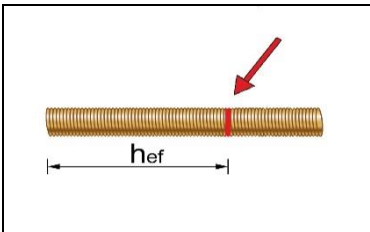

4. Mark embedment depth on the anchor rod. The anchor rod shall be free of dirt, grease, oil or other foreign material.

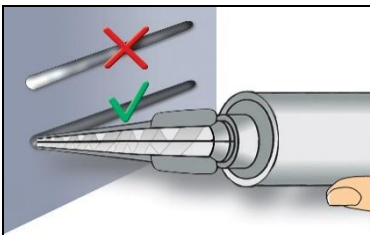

5. Not proper mixed mortar is not sufficient for fastening. Dispense and discard mortar until a uniform grey colour is shown (at least 3 full strokes; for foil tube cartridges min. 6 strokes).

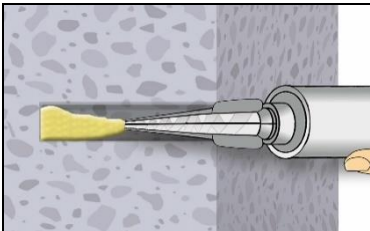

6. Starting at bottom of the hole and fill the hole up to approximately 2/3 with adhesive (If necessary, a mixer nozzle extension shall be used.) Slowly withdraw of the static mixing nozzle avoid creating air pockets Observe the temperature related working time t_{work} (Annex B 3).




7. Insert the anchor rod while turning slightly up to the embedment mark.

Unifix Injection System Poly 3.0 for concrete


Intended use
Installation instructions (continuation)

Annex B 5


Installation instructions (continuation)

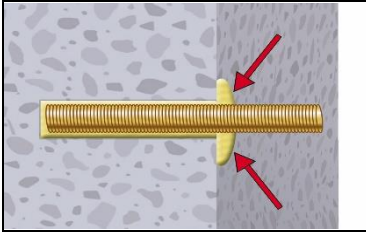

8. Annular gap between anchor rod and base material must be completely filled with mortar. In case of push through installation the annular gap in the fixture must be filled with mortar also. Otherwise, the installation must be repeated starting from step 6 before the maximum working time t_{work} has expired.

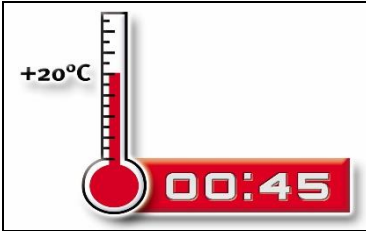

9. Temperature related curing time t_{cure} (Annex B 3) must be observed. Do not move or load the fastener during curing time.

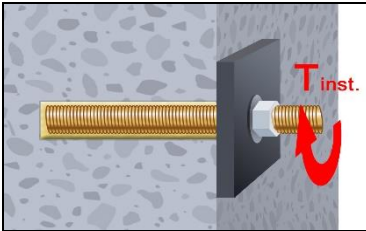

10. Install the fixture by using a calibrated torque wrench. Observe maximum installation torque (Table B1).

Unifix Injection System Poly 3.0 for concrete

Intended use
Installation instructions (continuation)

Annex B 6

Table C1: Characteristic values for steel tension resistance and steel shear resistance of threaded rods							
Size			M8	M10	M12	M16	
Cross section area	A_s	[mm ²]	36,6	58	84,3	157	
Characteristic tension resistance, Steel failure ¹⁾							
Steel, Property class 4.6 and 4.8	$N_{Rk,s}$	[kN]	15 (13)	23 (21)	34	63	
Steel, Property class 5.6 and 5.8	$N_{Rk,s}$	[kN]	18 (17)	29 (27)	42	78	
Steel, Property class 8.8	$N_{Rk,s}$	[kN]	29 (27)	46 (43)	67	125	
Stainless steel A2, A4 and HCR, class 50	$N_{Rk,s}$	[kN]	18	29	42	79	
Stainless steel A2, A4 and HCR, class 70	$N_{Rk,s}$	[kN]	26	41	59	110	
Stainless steel A4 and HCR, class 80	$N_{Rk,s}$	[kN]	29	46	67	126	
Characteristic tension resistance, Partial safety factor ²⁾							
Steel, Property class 4.6 and 5.6	$\gamma_{Ms,N}$	[-]	2,0				
Steel, Property class 4.8, 5.8 and 8.8	$\gamma_{Ms,N}$	[-]	1,5				
Stainless steel A2, A4 and HCR, class 50	$\gamma_{Ms,N}$	[-]	2,86				
Stainless steel A2, A4 and HCR, class 70	$\gamma_{Ms,N}$	[-]	1,87				
Stainless steel A4 and HCR, class 80	$\gamma_{Ms,N}$	[-]	1,6				
Characteristic shear resistance, Steel failure ¹⁾							
Without lever arm	Steel, Property class 4.6 and 4.8	$V^0_{Rk,s}$	[kN]	9 (8)	14 (13)	20	38
	Steel, Property class 5.6 and 5.8	$V^0_{Rk,s}$	[kN]	9 (8)	15 (13)	21	39
	Steel, Property class 8.8	$V^0_{Rk,s}$	[kN]	15 (13)	23 (21)	34	63
	Stainless steel A2, A4 and HCR, class 50	$V^0_{Rk,s}$	[kN]	9	15	21	39
	Stainless steel A2, A4 and HCR, class 70	$V^0_{Rk,s}$	[kN]	13	20	30	55
	Stainless steel A4 and HCR, class 80	$V^0_{Rk,s}$	[kN]	15	23	34	63
With lever arm	Steel, Property class 4.6 and 4.8	$M^0_{Rk,s}$	[Nm]	15 (13)	30 (27)	52	133
	Steel, Property class 5.6 and 5.8	$M^0_{Rk,s}$	[Nm]	19 (16)	37 (33)	65	166
	Steel, Property class 8.8	$M^0_{Rk,s}$	[Nm]	30 (26)	60 (53)	105	266
	Stainless steel A2, A4 and HCR, class 50	$M^0_{Rk,s}$	[Nm]	19	37	66	167
	Stainless steel A2, A4 and HCR, class 70	$M^0_{Rk,s}$	[Nm]	26	52	92	232
	Stainless steel A4 and HCR, class 80	$M^0_{Rk,s}$	[Nm]	30	59	105	266
Characteristic shear resistance, Partial safety factor ²⁾							
Steel, Property class 4.6 and 5.6	$\gamma_{Ms,V}$	[-]	1,67				
Steel, Property class 4.8, 5.8 and 8.8	$\gamma_{Ms,V}$	[-]	1,25				
Stainless steel A2, A4 and HCR, class 50	$\gamma_{Ms,V}$	[-]	2,38				
Stainless steel A2, A4 and HCR, class 70	$\gamma_{Ms,V}$	[-]	1,56				
Stainless steel A4 and HCR, class 80	$\gamma_{Ms,V}$	[-]	1,33				
¹⁾ Values are only valid for the given stress area A_s . Values in brackets are valid for undersized threaded rods with smaller stress area A_s for hot-dip galvanised threaded rods according to EN ISO 10684:2004+AC:2009. ²⁾ In absence of national regulation							
Unifix Injection System Poly 3.0 for concrete						Annex C 1	
Performances Characteristic values for steel tension resistance and steel shear resistance of threaded rods							

Table C2: Characteristic values of tension loads under static and quasi-static action				
Anchor size			All anchors types and sizes	
Concrete cone failure				
Uncracked concrete	$k_{ucr,N}$	[-]	11,0	
Edge distance	$c_{cr,N}$	[mm]	$1,5 h_{ef}$	
Axial distance	$s_{cr,N}$	[mm]	$2 c_{cr,N}$	
Splitting				
Edge distance	$h/h_{ef} \geq 2,0$	$c_{cr,sp}$	[mm]	$1,0 h_{ef}$
	$2,0 > h/h_{ef} > 1,3$			$2 \cdot h_{ef} \left(2,5 - \frac{h}{h_{ef}} \right)$
	$h/h_{ef} \leq 1,3$			$2,4 h_{ef}$
Axial distance	$s_{cr,sp}$	[mm]	$2 c_{cr,sp}$	
Unifix Injection System Poly 3.0 for concrete				Annex C 2
Performances Characteristic values of tension loads under static and quasi-static action				

Table C3: Characteristic values of tension loads under static and quasi-static action								
Anchor size threaded rod				M8	M10	M12	M16	
Steel failure								
Characteristic tension resistance				$N_{Rk,s}$	[kN]	$A_s \cdot f_{uk}$ (or see Table C1)		
Partial factor				$\gamma_{Ms,N}$	[-]	See Table C1		
Combined pull-out and concrete failure								
Characteristic bond resistance in uncracked concrete C20/25								
Temperature range	I: 40°C/24°C	Dry and wet concrete	$\tau_{Rk,ucr}$	[N/mm ²]	6,0	6,0	6,0	6,0
	II: 80°C/50°C				4,5	4,5	4,5	4,5
	I: 40°C/24°C	Flooded bore hole			6,0	6,0	6,0	6,0
	II: 80°C/50°C				4,5	4,5	4,5	4,5
Increasing factor for concrete				ψ_c	[-]	$(f_{ck} / 20)^{0,2}$		
Characteristic bond resistance depending on the concrete strength class				$\tau_{Rk,ucr} =$		$\psi_c \cdot \tau_{Rk,ucr,(C20/25)}$		
Concrete cone failure								
Relevant parameter				See Table C2				
Splitting								
Relevant parameter				See Table C2				
Installation factor								
Dry and wet concrete				γ_{inst}	[-]	1,2		
Flooded bore hole						1,4		
Unifix Injection System Poly 3.0 for concrete							Annex C 3	
Performances Characteristic values of tension loads under static and quasi-static action								

Table C4: Characteristic values of shear loads under static and quasi-static action						
Anchor size threaded rod		M8	M10	M12	M16	
Steel failure without lever arm						
Characteristic shear resistance Steel, strength class 4.6 and 4.8	$V_{Rk,s}^0$	[kN]	$0,6 \cdot A_s \cdot f_{uk}$ (or see Table C1)			
Characteristic shear resistance Steel, strength class 5.6, 5.8 and 8.8 Stainless Steel A2, A4 and HCR, all classes	$V_{Rk,s}^0$	[kN]	$0,5 \cdot A_s \cdot f_{uk}$ (or see Table C1)			
Partial factor	$\gamma_{Ms,V}$	[-]	See Table C1			
Ductility factor	k_7	[-]	1,0			
Steel failure with lever arm						
Characteristic bending moment	$M_{Rk,s}^0$	[Nm]	$1,2 \cdot W_{el} \cdot f_{uk}$ (or see Table C1)			
Elastic section modulus	W_{el}	[mm ³]	31	62	109	277
Partial factor	$\gamma_{Ms,V}$	[-]	See Table C1			
Concrete pry-out failure						
Factor	k_8	[-]	2,0			
Installation factor	γ_{inst}	[-]	1,0			
Concrete edge failure						
Effective length of fastener	l_f	[mm]	$\min(h_{ef}; 12 \cdot d_{nom})$			
Outside diameter of fastener	d_{nom}	[mm]	8	10	12	16
Installation factor	γ_{inst}	[-]	1,0			
Unifix Injection System Poly 3.0 for concrete						
Performances Characteristic values of shear loads under static and quasi-static action						
Annex C 4						

